


Remarks

Claims 1-10 are currently pending. Claims 1-10 have been amended. Claims 11-17 are new.

It is believed that no fees are due in connection with the filing of this Preliminary Amendment. However, if any fees are due, the Commissioner is hereby authorized to deduct the fees from Meyertons, Hood, Kivlin, Kowert & Goetzel Deposit Account No. 50-1505/5310-08800/EBM.

Respectfully submitted,

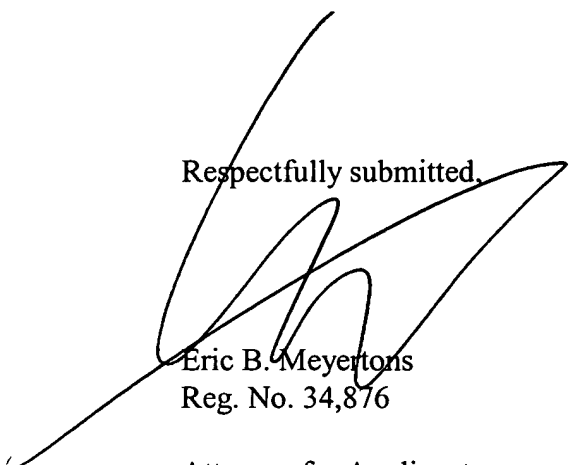

Eric B. Meyertons
Reg. No. 34,876

Attorney for Applicants

MEYERTONS, HOOD, KIVLIN, KOWERT & GOETZEL, P.C.
P.O. BOX 398
AUSTIN, TX 78767-0398
(512) 853-8800 (voice)
(512) 853-8801 (facsimile)

Date: Oct 6, 2005

~~Centrifugal motor-compressor unit~~
BACKGROUND OF THE INVENTION

1. Field of the Invention

5

The invention relates to a centrifugal compressor unit.

More specifically, the invention relates to a centrifugal compressor unit of the integrated type, that is to say of the type in which the compressor and a motor means for driving the compressor are mounted in a common housing sealed against the gas handled by the compressor.

10

2. Brief Description of the Related Art

15

With reference to figure 1, a conventional integrated compressor unit ~~comprises~~includes a motor means, generally ~~consisting of~~including an electric drive motor ~~denoted by the general numerical reference 10~~ and a centrifugal compressor 12 ~~comprising~~including, for example, several compression stages, the entity being mounted in a common housing sealed against the gas handled by the compressor.

20

As can be seen in ~~this~~ figure 1, the motor 10 rotationally drives a rotor 16 itself rotationally driving a driven shaft 18 supporting a set of compression impeller wheels 20, 22, 24 and 26.

25

In the example of a compressor unit illustrated in figure 1, the compressor ~~comprises~~includes four compression stages which together compress a gas taken in via an inlet pipe 28 to deliver it on the outlet side 30, passing via a volute casing 32.

30

The rotor 16 and the driven shaft 18 are connected via a flexible coupling 34. In this case, the rotor 16 and the driven shaft 18 are each supported by radial bearings 36, 38, 40,

STRIKETHROUGH SHEET

and 42. An opening 44 formed in the housing 14 and closed off by a blanking means 46 allows access to the flexible coupling 34 for assembling the compressor.

Finally, Figure 1 shows that an axial thrust bearing 48 limits the axial displacement of the driven shaft 18, while an equalizing piston 49 allows the axial pressure applied to the driven shaft while the compression unit is in operation to be equalized.

Producing a compressor unit in the form of a motor and of a compressor which are located in a pressurized sealed common housing makes it possible to eliminate the sealing gaskets needed by the compressor. These ~~are being~~ elements liable to compromise the reliability of the compressor unit and to be the source of gas leaks into the atmosphere. In this case, the motor is located actually within the gas handled by the compressor. In order to avoid an excessive increase in the mechanical losses of the motor as a result of ventilation, the motor is arranged in such a way that it is at the intake pressure of the compressor. ~~It is thus necessary to provide a circulation of~~ Thus gas is circulated through the motor in order to remove the losses, that is to say in the stator in order to remove the losses through a Joule effect in the windings, and in the air gap between the rotor and the stator in order to remove the ventilation losses and the eddy current losses in the rotor.

This is why centrifugal compressor units are generally provided with means for cooling the motor means and the guide bearings by tapping off gas leaving the first compression stage in order to cool the motor and the bearings. In this respect, reference may be made to documents EP-A-1 069 313 and US 6 390 789, which describe various types of motor-compressor units in which the motor and the bearings are cooled by tapping cooling gas from the outlet side of the first compression stage.

However, this type of cooling technique presents a certain number of major disadvantages, particularly as a result of the fact that it does not allow optimum cooling of the motor and of the bearings.

STRIKETHROUGH SHEET

~~The object of the invention is~~ There is a need to alleviate this disadvantage and to |
provide a motor-compressor unit that exhibits improved cooling means.

STRIKETHROUGH SHEET

SUMMARY OF THE INVENTION

~~_____The object of the invention is therefore a~~ A centrifugal compressor unit of the type includes ~~comprising~~ a motor means rotationally driving a rotor and at least one compressor ~~comprising~~including a stator body and a set of impeller wheels which are mounted on a driven shaft rotationally driven by the rotor in the stator body, the entity ~~consisting of~~including the motor and the or each compressor being mounted in a common housing sealed against the gas handled by the compressor unit, the compressor unit further ~~comprising~~including a set of active bearings for axially and radially guiding the rotor on the driven shaft and cooling means for cooling the motor means and the guide bearings by tapping off some of the gas handled by the compressor at the outlet from a first compression stage, passing said gas through the motor means and through the bearings and reinjecting the gas into the inlet side of the compressor.

~~_____According to one general feature of this~~ In some embodiments of a centrifugal compressor unit, the cooling means ~~includes~~~~comprise~~ a set of internal passages for feeding the motor means and the bearings with cooling gas, ~~the~~ The flow of cooling gas in the motor means ~~being~~~~is~~ separate from the flow of cooling gas in the bearings and converging upstream of the first compression stage.

It has been found that such an arrangement ~~makes it possible to~~improves considerably the cooling within the compressor unit. Specifically, it has been found that the size of the air gap of the magnetic bearings compared with the size of the air gap of the motor detracts from cooling when the same flow is used to cool the bearings and the motor, by preventing the cooling gas from circulating correctly. What happens is that the motor generates greater losses than the bearings and therefore requires a higher flow rate. Likewise, the temperature of the cooling gas leaving the motor detracts from the cooling of the bearings when the flow of cooling gas leaving the motor is used to cool the bearings.

STRIKETHROUGH SHEET

~~According to another feature of the invention~~In some embodiments, the cooling means further ~~comprise~~includes a set of external lines collecting the gas on the outlet side of the first compression stage and feeding the internal passages in parallel.

5 ~~_____~~In one embodiment, the internal passages for feeding the motor means are fed in parallel with the internal passages for feeding the bearings with cooling gas.

~~As a preference, the~~The cooling means are equipped with filtering means for filtering the gas handled by the compressor.

10

~~_____According to another feature~~In certain embodiments of the compressor unit ~~according to the invention~~, with the driven shaft of the compressor supported by two end radial bearings, the cooling means ~~comprise~~includes an axial passage running from one bearing to the other and fed at one of its ends by the external lines, said axial passage globally running
15 longitudinally and radially externally through the compressor.

For example, the internal passages for feeding the bearings ~~comprise~~includes a set of directional passages directed radially externally in the compressor and each feeding one bearing.

20

~~_____According to yet another feature of the invention~~In some embodiments, the motor is fed with cooling gas via an orifice formed in an end cover and in communication with an external line._

25 The flow of cooling gas may be mixed with the flow of cooling gas leaving the bearings cooled by the gas coming from the internal passages._

For example, the motor-compressor unit ~~comprise~~includes means for regulating the refrigeration flow rate for the motor on the one hand and for each bearing on the other.

30

STRIKETHROUGH SHEET

~~_____ According to another feature of the invention~~ In some embodiments, the compressor unit ~~comprise~~ includes means for collecting flows of cooling gas from members situated on the same side as an equalizing piston.

STRIKETHROUGH SHEET

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects, features and advantages of the invention will become apparent from reading the following description, given solely by way of a nonlimiting example and made
5 with reference to the attached drawings in which:

- Figure 1——~~already mentioned~~, illustrates an embodiment of the overall structure of a conventional integrated motor-compressor unit;

10 - Figure 2——_is a block diagram of an embodiment of a centrifugal compressor unit ~~according to the invention~~;

- Figure 3——_illustrates one embodiment of a centrifugal compressor unit~~—according to the invention~~;

15 - Figure 4——_illustrates one embodiment of a compressor unit~~—produced according to the teachings of the invention~~;

- Figure 5——_illustrates another embodiment of a compressor unit~~—produced according to the teachings of the invention~~; and
20

- Figure 6——_illustrates ~~yet another exemplary~~ an embodiment of a compressor unit ~~produced according to the teachings of the invention~~.

25

STRIKETHROUGH SHEET

DETAILED DESCRIPTION OF EMBODIMENTS

~~The general principle of operation of a compressor unit according to the invention will now be described with reference to figure 2. This f~~Figure 2 depicts just one compression stage for reasons of clarity, the other compression stages not having been depicted. It will, however, be appreciated that it may be provided with any number of compression stages, as will be discussed later with reference to figure 3 to 6.

The compressor unit illustrated in this Figure 2 ~~comprise~~includes a motor means 50, consisting for example of a variable high-speed electric motor rotationally driving a rotor 52, itself driving, at the same speed, a driven shaft 54 on which an impeller wheel 56 is mounted. The rotor 52 and the driven shaft 56 are connected via a flexible coupling 58. As a result, the rotor 52 and the driven shaft 54 are each supported by two end radial bearings 60, 62 and 64, 66, respectively. A thrust bearing 67 limits the axial displacement of the rotor 54 when the compressor is in operation, this displacement being caused by the appearance of axial forces that are due to the appearance of a differential pressure across the impeller wheel 56.

The impeller wheel 56 draws in a compressed gas delivered from an intake pipe 68 to increase its static pressure and thus increase its kinetic energy. A diffuser 70 (figure 3) slows the gas coming from the impeller wheel 56 to increase its pressure. Downstream, a return duct 72 leads the gas towards compression stages 74, ...76 located downstream.

~~As can be seen~~shown in figures 2 and 3, in order to cool the motor 50 and the bearings 60, 62, 64 and 66 and the thrust bearing 67 that limits the axial displacement of the rotor 50, some of the gas leaving the first compression stage 56 is tapped off and used as a cooling gas._

These various elements, ~~namely such as~~ the motor, the bearings and the thrust bearing are cooled using separate flows of cooling gas, ~~that is to say f~~Flows in parallel are, delivered by passages 80-1, 80-2, ..., 80-6 forming part of a set of external lines collecting the gas leaving the first compression stage 56, after passing through a set of filter cartridges such as 82. As

STRIKETHROUGH SHEET

will be appreciated, this arrangement, whereby the motor, on the one hand, and the bearings, on the other, are fed in parallel with separate cooling flows, makes it possible to get around the constraints associated with the size of the air gap of the magnetic bearings, on the one hand, and of the motor, on the other.

5

As can be seen in figure 3, according to one ~~exemplary~~ embodiment, the stator part of the compressor ~~comprises~~includes a tubing 84 collecting the fluid leaving the diffuser 70, which ~~The~~ tubing passes through the casing 86 of the compressor. For actually cooling the motor and the bearings, the motor-compressor unit ~~comprises~~ includes a set of internal feed
10 ducts fed respectively from the external pipes 80-1, ..., 80-6. ~~h~~Having passed through the motor and the bearings, the cooling gas is collected by a generally longitudinal central duct 88 which opens into the intake pipe 68 upstream of the first compression stage 56.

To cool the motor 50 and the end bearings 60 and 62 supporting the rotor 52, the
15 corresponding end cover 90 closing the casing 86 is provided with an orifice 92 which communicates with the corresponding external pipe 80-1. Part of this cooling flow is used to cool the bearing 60. This flow is then collected for cooling the motor, by passing it through the motor air gap. Another part of this flow is used directly to cool the motor._

20 A second internal passage 94 is fed from the external lines to cool the second bearing 62 of the motor._-

Downstream, the flow of cooling gas used to cool the bearings 60 and 62 and the motor 50 is collected in a cavity 95 in which the flexible coupling 58 is located and which is closed off by
25 sealed blanking means 96._

Downstream, as depicted by the arrows F, the gas is collected by the internal passage 88 to be reinjected upstream of the first compression stage 56.

30 _____Furthermore, in some embodiments, the bearings and the thrust bearing are cooled using a flow of cooling gas delivered through an end cover 98 blanking off the corresponding

STRIKETHROUGH SHEET

end of the casing 86. ~~Indeed it can be seen in this~~In figure 3, ~~that this~~ cover 98 is provided with an orifice 100 which communicates with a corresponding external pipe 80-6. This flow of cooling gas cools, on the one hand, the end bearing 66 situated at the same end as this cover 98 and the opposite-end end bearing 64, via an axial pipe 104 which runs longitudinally and radially externally between these bearings 64 and 66, through the compressor stator elements. This axial pipe is also shaped in such a way as also to cool the thrust bearing 78. The flow of gas is therefore reinjected into the passage 88._

~~It will be noted that~~In some embodiments, withdrawing cooling gas on the outlet side of the first compression stage makes it possible to tap off gas that is not as hot as it would have been had it been taken from the outlet side of the compressor, making the cooling more effective, while at the same time limiting the compression power that has to be developed in order to raise the pressure of this gas._

In addition, this tapping represents an autonomous feed once the motor has been started, means 105 for adjusting the cooling flow rate for the motor, on the one hand, and for each of the bearings, on the other, being provided so as to create appropriate and controlled pressure drops in the external lines. These adjusting means may be active, of the regulating valve type, or passive, of the fixed orifice type.

~~It will be noted that, in~~In the exemplary embodiment illustrated in Figure 3, the intake of gas into the compressor is situated on the electric motor side. The aforementioned cooling principle may also be applied to an arrangement in which the delivery side of the compressor is on the motor side. In this case, it is the flow of cooling gas leaving the motor or, in general, leaving components situated on the same side as the equalizing piston 107, which is mixed with the flow of gas from this equalizing piston 107 to then be injected into the intake pipe 86 via an equalizing line 108.

For maintenance, in an embodiment, the sealed blanking means 96 allows access to the flexible coupling 58. Extracting the rotor from the motor is, for its part, done by removing the end cover 90, which for example is bolted on to the casing. Removal of the internal part

STRIKETHROUGH SHEET

of the compressor is, for its part, done by extracting the corresponding cover 98, which for example is fixed to the casing by a shear ring 110. ~~As a preference~~In an embodiment, the entity is arranged in such a way that the rotor-diaphragms assembly, that is to say the entirety of the compressor, can be withdrawn from the casing at the same time as the cover 98 without having to detach the casing from its baseplate and from the process gas pipework and the cooling lines. It will be noted that, during these assembly-disassembly phases, the rotors rest on their bearing, which makes the coupling and uncoupling operations easier, without the risk of damaging the rotating parts and the stator parts which might otherwise come into contact with the rotors during these operations.

~~Finally, it~~It will be noted that the invention is not restricted to the embodiments described._

Specifically, whereas figures 2 and 3 depict a centrifugal compressor unit equipped with a multi-stage compressor incorporated in-line with a single compression section having multiple stages, the invention also applies to other types of compressor unit, for example those having two in-line sections S1 and S2, for example each ~~comprising~~including two stages, each compressing a process gas, as depicted in Figures 4 and 5._

~~In this case, in an exemplary~~the embodiment depicted in Figure 4, two inlets E'1 and E'2 and two outlets S'1 and S'2 are provided in the casing such that the inlet E'2 of the second section is near the outlet S'1 of the first section. Thus, in this case, as can be seen in figure 4, the first compression stage of one of the sections S2 is located facing the second compression stage of the other section S1._

By contrast, as ~~can be seen~~ in figure 5, for a configuration known by the name "back-to-back", the first compression stages of each of the sections S1 and S2 may be placed side by side. In this case, the outlets S'1 and S'2 of these compression stages are located side by side and the inlets E'1 and E'2 are located at opposite ends from one another._

STRIKETHROUGH SHEET

~~It will finally be noted, as visible in~~ In figure 6, that the invention also applies to an arrangement in which use is made, arranged in a common casing, of a motor 50 and two compressor units G1 and G2 each provided with respective compression stages S3, S4, S5 and S6 and S'3, S'4, S'5 and S'6 each mounted on a respective driven shaft 54 and 54', these shafts being fixed at two mutually opposed ends of the rotor 52 using flexible couplings 58 and 58'.

Of course, this arrangement with two compression units may use any arrangement, such as either one of the arrangements described hereinabove with reference to figures 4 and 5.

In these various embodiments, use is made of means for cooling the motor and the bearings that use parallel flows of cooling gas.

As will be appreciated, ~~the invention which has just been described does not require the provision of separate fluids for cooling the motor and the bearings~~ are not required. Furthermore, the electric motor, the bearings and the magnetic thrust bearing are cooled autonomously with the flow rate needed for each distributed to each, these various flows then being collected to be reinjected into the inlet side of the first compression stage.

These features make it possible to minimize the size of the machine and to simplify the installation. Furthermore, producing internal passages makes it possible to limit the space required for the external lines.

In some embodiments, ~~It will also be noted that the invention which has just been described makes it~~ is possible to limit the gas leaks to the outside. The reliability is also improved in that integrated filtration of the motor cooling gas ~~is provided~~. Furthermore, the use of several filter cartridges arranged in parallel and associated with a set of valves allows these cartridges to be changed during running.

~~Finally, the invention is not restricted to the embodiments described.~~

STRIKETHROUGH SHEET

~~Specifically, in the description given hereinabove, the filtering means are produced in the~~
~~form of cartridges mounted on the external pipes, however, it is equally possible, as a~~
variant, to mount the cartridges within the compressor unit housing, at a location that makes
them readily accessible, in this instance, for example, in the cavity 95 that provides access to
5 the coupling, preferably mounting them on the blanking means.

STRIKETHROUGH SHEET

Abstract

~~The invention relates to a~~ A centrifugal compressor unit includes ~~comprising~~ a driving means (50) for rotatably driving a rotor (52), and at least one compressor

5 ~~comprising~~ including a statoric body and an arrangement of blade wheels (56) mounted on a shaft which is roatably driven by the rotor in the statoric body, ~~the~~ The group formed by the motor and ~~the~~ or each compressor being mounted in a common housing (86) ~~which~~ is sealed from the gas used by the compressor. The compressor unit also ~~comprises~~ includes an arrangement of active bearings (60, 62, 64, 66, 67) for axially and radially guiding the rotor

10 and the driven shaft, and a means for cooling the driving means and the guiding bearings by withdrawing the gas used by the compressor at the outlet of a first compression stage. The ~~cooling~~ cooling means includes ~~comprises~~ a set of internal conduits (80-1, 80-2, 80-3, 80-4, 80-5, 80-6) for supplying the driving means and the bearings with cooling gas, ~~the~~ The cooling gas flow in the motor and the cooling gas flow in the bearing ~~being~~ is separated and then

15 ~~converging~~ upstream of the first compression stage.

STRIKETHROUGH SHEET